



HannStar Display Corp.

Document Title	HSD101PUW1-A Product Information	Page No.	1/20
Document No.		Revision	1.2

TO :

Date : Oct, 31, 2013

## **HannStar Product Information**

**Model: HSD101PUW1  
-A00**

- Note: (1) Please contact HannStar Display Corp. before designing your product based on this module specification.
- (2) The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by HannStar for any intellectual property claims or other problems that may result from application based on the module described herein.

Document Title	HSD101PUW1-A Product Information	Page No.	2/20
Document No.		Revision	1.2

## Record of Revisions

Rev.	Date	Sub-Model	Description of change
1.2	Oct., 31, 2013	A00	Product Information was first released.



Document Title	HSD101PUW1-A Product Information	Page No.	3/20
Document No.		Revision	1.2

## Contents

1.0	General description .....	p.4
2.0	Absolute maximum ratings.....	p.5
3.0	Optical characteristics.....	p.6
4.0	Block diagram .....	p.10
5.0	Interface pin connection .....	p.12
6.0	Electrical characteristics .....	p.13
7.0	Reliability test items .....	p.14
8.0	Outline dimension .....	p.15
9.0	Lot mark .....	p.17
10.0	Package specification .....	p.18
11.0	General precaution .....	p.18

Document Title	HSD101PUW1-A Product Information	Page No.	4/20
Document No.		Revision	1.2

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

HannStar Display model HSD101PUW1-A is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 10.1 (16:10) inch diagonally measured active display area with WUXGA (1920 horizontal by 1200 vertical pixel) resolution.

### 1.2 Features

- 10.1 (16:10 diagonal) inch configuration
- MIPI
- 8 bit
- RoHS Compliance
- Halogen Free

### 1.3 Applications

- Tablet
- Notebook

### 1.4 General information

Item		Specification	Unit
Outline Dimension		228.60(H) x 148.15(V)	mm
Display area		217.44(H) x 135.9(V)	mm
Number of Pixel		1920 RGB (H) x 1200(V)	pixels
Pixel pitch		0.1695(H) x 0.1695(V)	mm
Pixel arrangement		RGB Vertical stripe	
Display mode		Normally Black	
NTSC		50	%
Surface treatment		HC	
Weight		(140)(Max.)	g
Back-light		White LED	
Power Consumption	Logic and BLU	(3.6W) Logic: (0.75W) BLU: (2.85W)	W

Document Title	HSD101PUW1-A Product Information	Page No.	5/20
Document No.		Revision	1.2

## 1.5 Mechanical Information

	Item	Min.	Typ.	Max.	Unit
Module Size	Horizontal (H)	228.30	228.60	228.90	mm
	Vertical (V)	147.85	148.15	148.45	mm
	Depth (D)			4.55	mm
Weight		—	—	140	g

## 2.0 ABSOLUTE MAXIMUM RATINGS

### 2.1 Electrical Absolute Rating

#### 2.1.1 TFT LCD Module

Item	Symbol	Min.	Max.	Unit	Note
Logic Supply voltage	V <sub>DD</sub>	TBD	TBD		

#### 2.1.2 Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Operating Temperature	T <sub>opa</sub>	0	50	°C	
Storage Temperature	T <sub>stg</sub>	-20	60	°C	

Document Title	HSD101PUW1-A Product Information	Page No.	6/20
Document No.		Revision	1.2

### 3.0 OPTICAL CHARACTERISTICS

#### 3.1 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast		CR	$\Theta=0$ Normal viewing angle	640	800	—		(1)(2)(4)
Response time	Rising	Tr+Tf		—	25	35	msec	(1)(3)
White luminance (5 point)		$Y_L$			(400)	—	cd/m <sup>2</sup>	(1)(4)(5) ( $I_L=23mA$ )
Color chromaticity (CIE1931)	Red	$R_x$			TBD			
		$R_Y$			TBD			
	Green	$G_x$			TBD			
		$G_Y$			TBD			
	Blue	$B_x$			TBD			
		$B_Y$			TBD			
	White	$W_x$			(0.313)			
		$W_y$		(0.329)				
Viewing angle	Hor.	$\Theta_L$	CR>10	80	89	—		(1)(4)
		$\Theta_R$		80	89	—		
	Ver.	$\Theta_U$		80	89	—		
		$\Theta_D$		80	89	—		
Brightness uniformity		$B_{UNI}$	$\Theta=0$ (5point)	—	—	TBD		(6)
Brightness Uniformity		$B_{UNI}$	$\Theta=0$ (13 points)	—	—	TBD		(6)

#### 3.2 Measuring Condition


- Measuring surrounding : dark room
- Ambient temperature : 25±2°C
- 15min. warm-up time.

Document Title	HSD101PUW1-A Product Information	Page No.	7/20
Document No.		Revision	1.2

### 3.3 Measuring Equipment

- FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.
- Measuring spot size : 20 ~ 21 mm

**Note (1)** Definition of Viewing Angle:

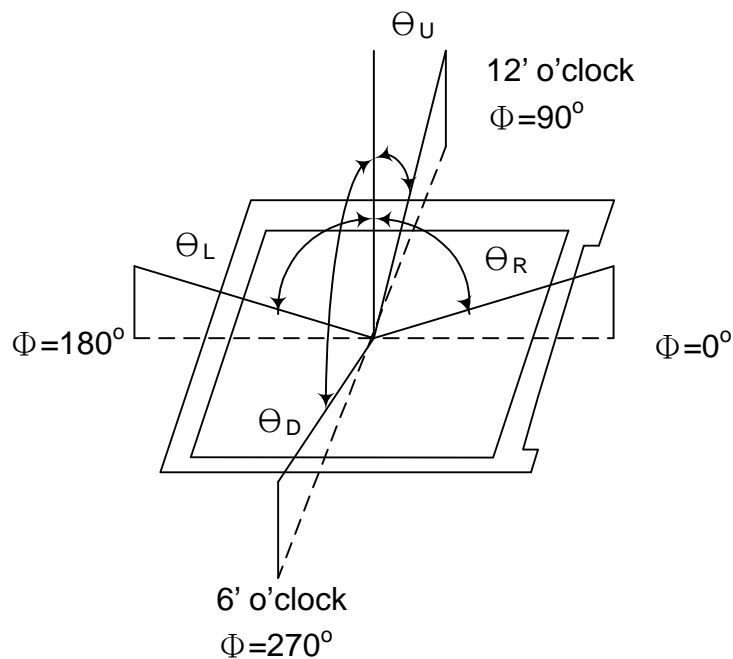


**Note (2)** Definition of Contrast Ratio (CR) :  
measured at the center point of panel


$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

Document Title	HSD101PUW1-A Product Information	Page No.	8/20
Document No.		Revision	1.2

**Note (3)** Definition of Response Time : Sum of  $T_R$  and  $T_F$

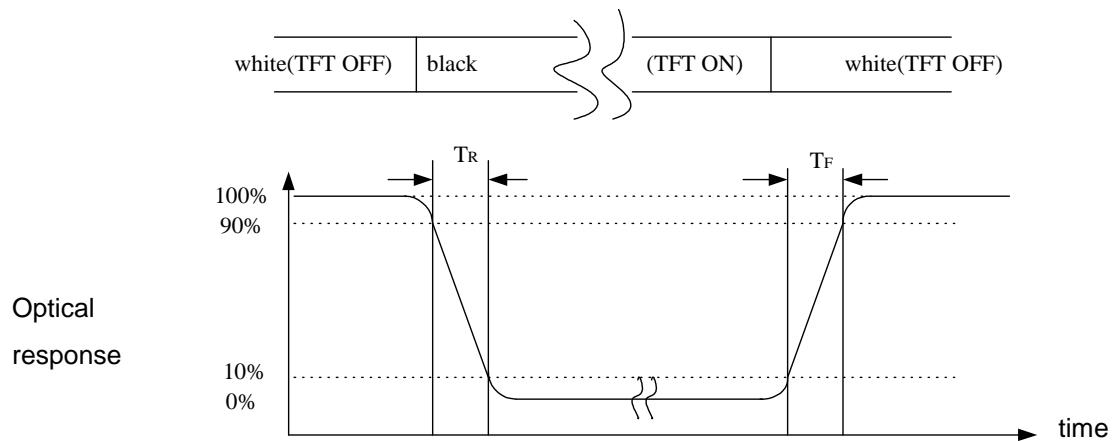

**Note (4)** Definition of optical measurement setup

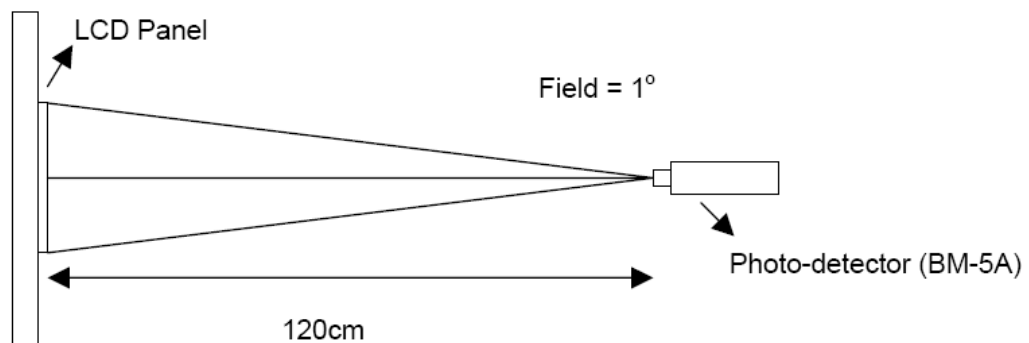




Document Title	HSD101PUW1-A Product Information	Page No.	9/20
Document No.		Revision	1.2

**Note (5)** Definition of Average Luminance Uniformity of White (5 Point)

$$\text{Average Luminance Uniformity} = \frac{Y_1 + Y_2 + Y_3 + Y_4 + Y_5}{5}$$

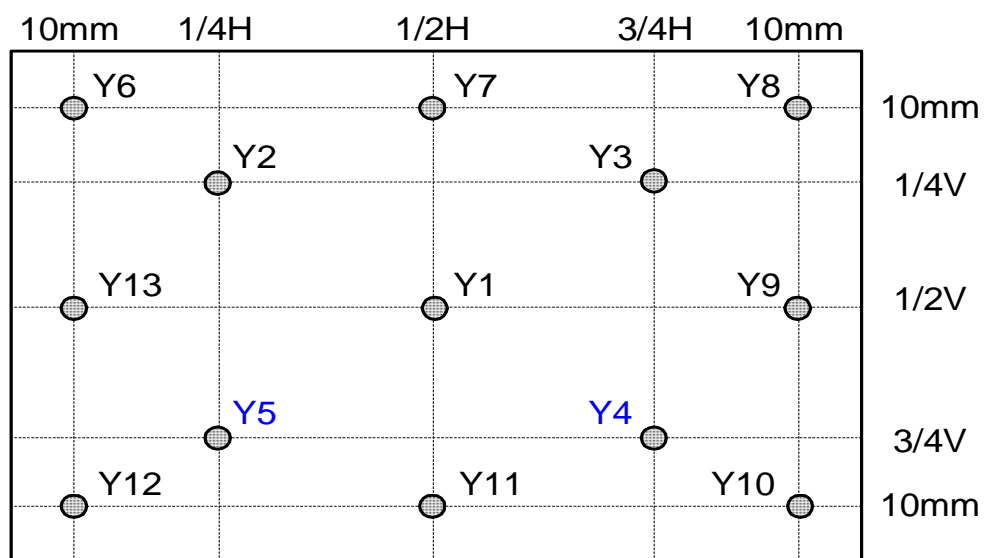

**Note (6)** Definition of brightness uniformity

$$\text{Luminance uniformity(5 points)} = \frac{(\text{Max Luminance of 5 points})}{(\text{Min Luminance of 5 points})}$$

$$\text{Luminance uniformity(13points)} = \frac{(\text{Max Luminance of 13 points})}{(\text{Min Luminance of 13 points})}$$


Document Title	HSD101PUW1-A Product Information	Page No.	10/20
Document No.		Revision	1.2

## 4.0 BLOCK DIAGRAM

### 4.1 TFT LCD Module:

TBD

### 4.2 Pixel Format

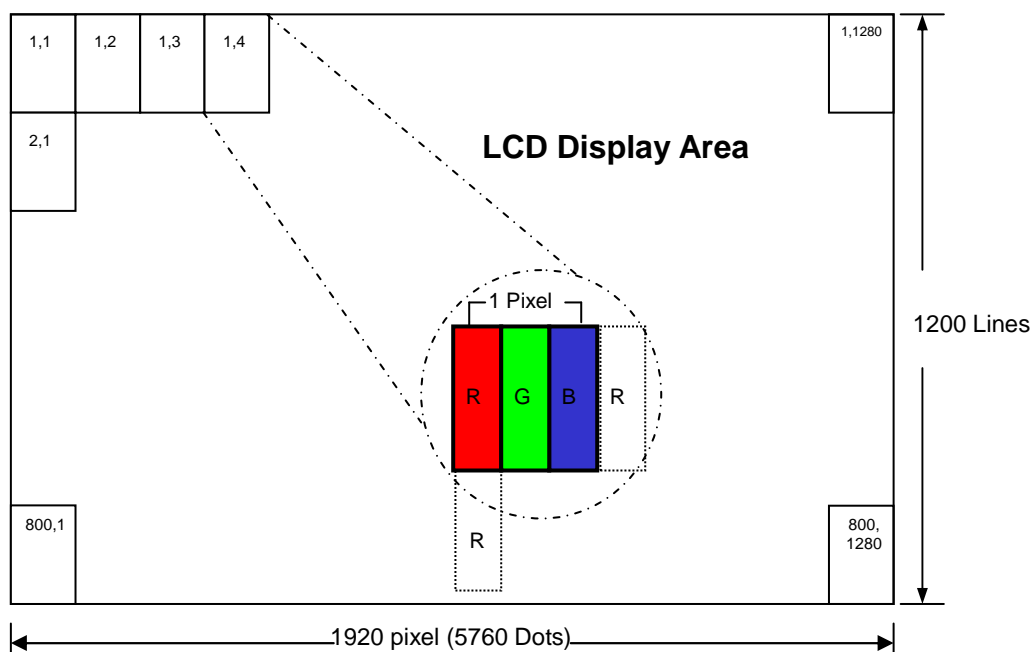



Document Title	HSD101PUW1-A Product Information	Page No.	11/20
Document No.		Revision	1.2

#### **4.3 Relationship Between Displayed Color and Input**

**TBD**

Document Title	HSD101PUW1-A Product Information	Page No.	12/20
Document No.		Revision	1.2

## 5.0 INTERFACE PIN CONNECTION

### 5.1 LCD Module : CN1 AYF533435 (PANASONIC)

Pin No.	Signal	Description
1	VDD	Power Supply, 3.0~4.2V
2	VDD	Power Supply, 3.0~4.2V
3	NC	Not connection
4	LED_EN	LED enable input
5	LED_PWM	Backlight dimming control
6	N/C	Not connection
7	N/C	Not connection
8	NC	Not connection
9	GND	Ground
10	DSI_D2P/Rx-IN2P	MIPI data pair 2 positive signal
11	DSI_D2N/Rx-IN2N	MIPI data pair 2 negative signal
12	GND	Ground
13	DSI_D1P/Rx-IN1P	MIPI data pair 1 positive signal
14	DSI_D1N/Rx-IN1N	MIPI data pair 1 negative signal
15	GND	Ground
16	DSI_CLKP/Rx-CKLP	MIPI Clock positive signal
17	DSI_CLKN/Rx-CKLN	MIPI Clock negative signal
18	GND	Ground
19	DSI_D0P/Rx-IN0P	MIPI data pair 0 positive signal
20	DSI_D0N/Rx-IN0N	MIPI data pair 0 negative signal
21	GND	Ground
22	DSI_D3P/Rx-IN3P	MIPI data pair 3 positive signal
23	DSI_D3N/Rx-IN3N	MIPI data pair 3 negative signal
24	GND	Ground
25	GND	Ground
26	GND	Ground
27	GND	Ground
28	ID	ID PIN (shorting to GND)
29	NC	Not connection
30	NC	Not connection
31	LED+	LED Power supply (3.5~12V)
32	LED+	LED Power supply (3.5~12V)
33	LED+	LED Power supply (3.5~12V)
34	LED+	LED Power supply (3.5~12V)



Document Title	HSD101PUW1-A Product Information	Page No.	13/20
Document No.		Revision	1.2

## 6.0 ELECTRICAL CHARACTERISTICS

TBD


Document Title	HSD101PUW1-A Product Information	Page No.	14/20
Document No.		Revision	1.2

## 7.0 Reliability test items

No.	Item	Conditions	Remark
1	High Temperature Storage	Ta=+60°C, 240hrs	
2	Low Temperature Storage	Ta=-20°C, 240hrs	
3	High Temperature Operation	Ta=+50°C, 300hrs	
4	Low Temperature Operation	Ta=0°C, 300hrs	
5	Thermal Cycling Test (non operation)	-20°C(30min)→+60°C(30min),100 cycles	
6	Vibration	Sine Wave 1.5G, 5~500Hz, XYZ 30min/each direction	
7	Shock	Half-Sine, 200G, 2ms, ±XYZ, 1time	

Note : There is no display function NG issue occurred, all the cosmetic specification is judged before the reliability stress.

### Storage / Operating temperature

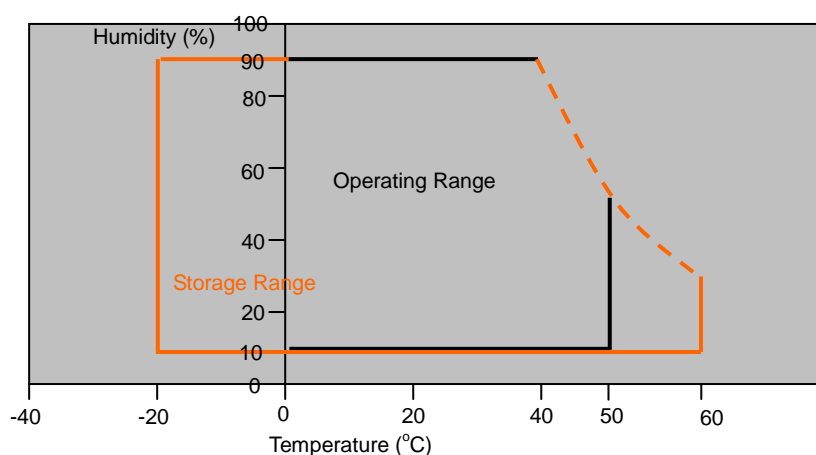


**Note** .Max wet bulb temp.=39°C

Document Title	HSD101PUW1-A Product Information	Page No.	15/20
Document No.		Revision	1.2

## 8.0 OUTLINE DIMENSION


### 8.1 Front View Outline Dimension

Unit : mm

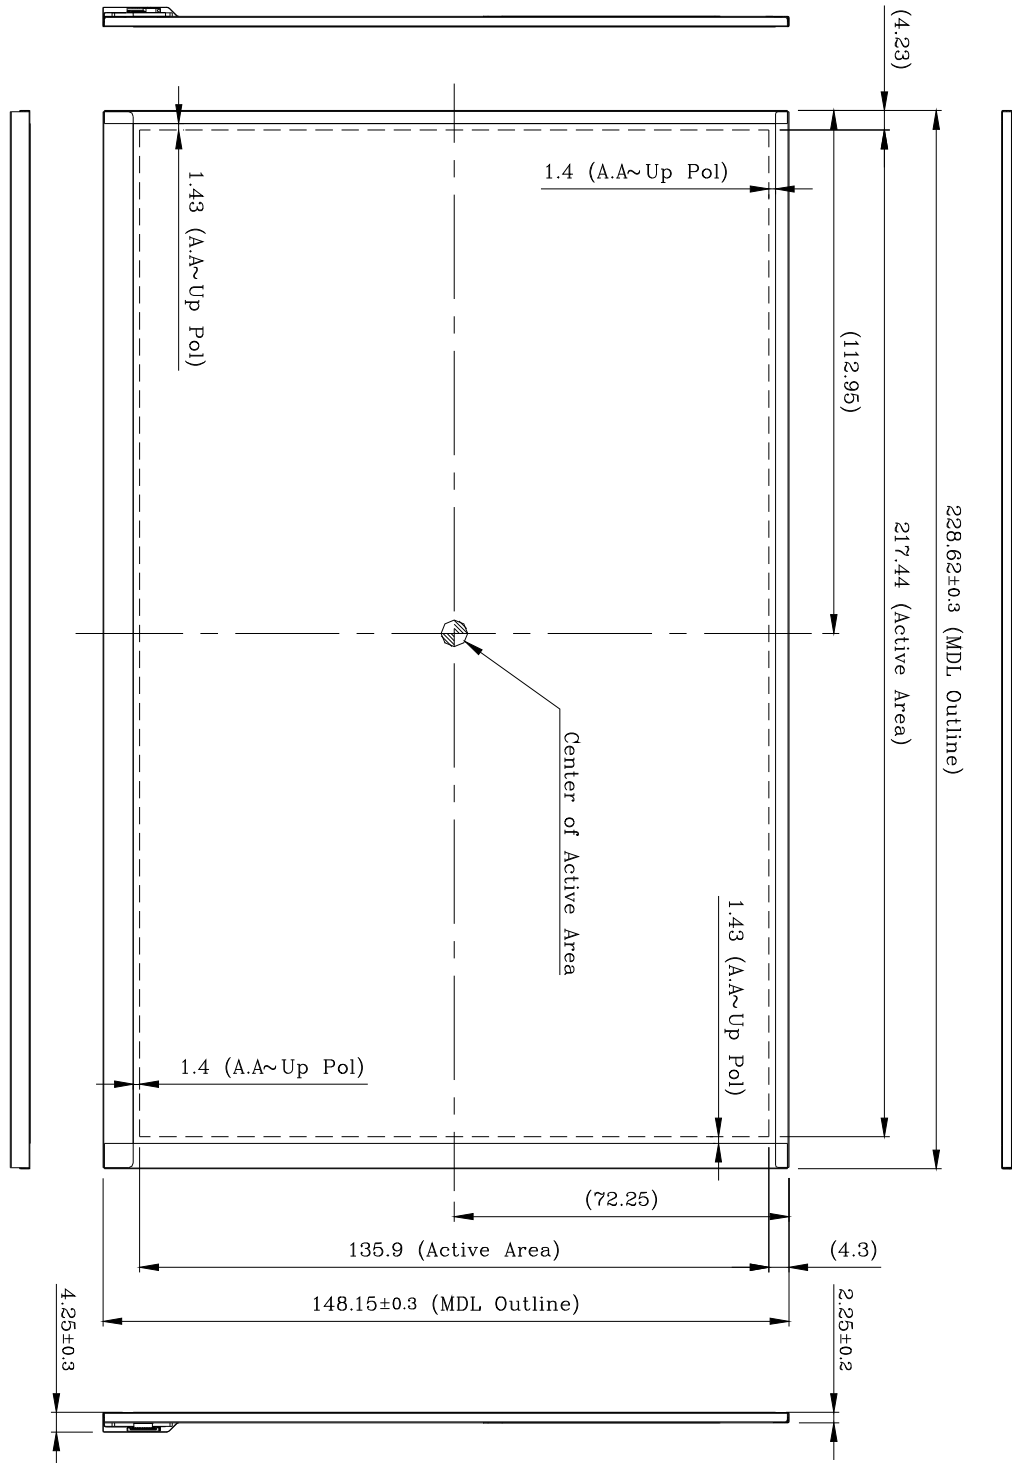

Document Title	HSD101PUW1-A Product Information	Page No.	16/20
Document No.		Revision	1.2

## 8.2 Back View Outline Dimension

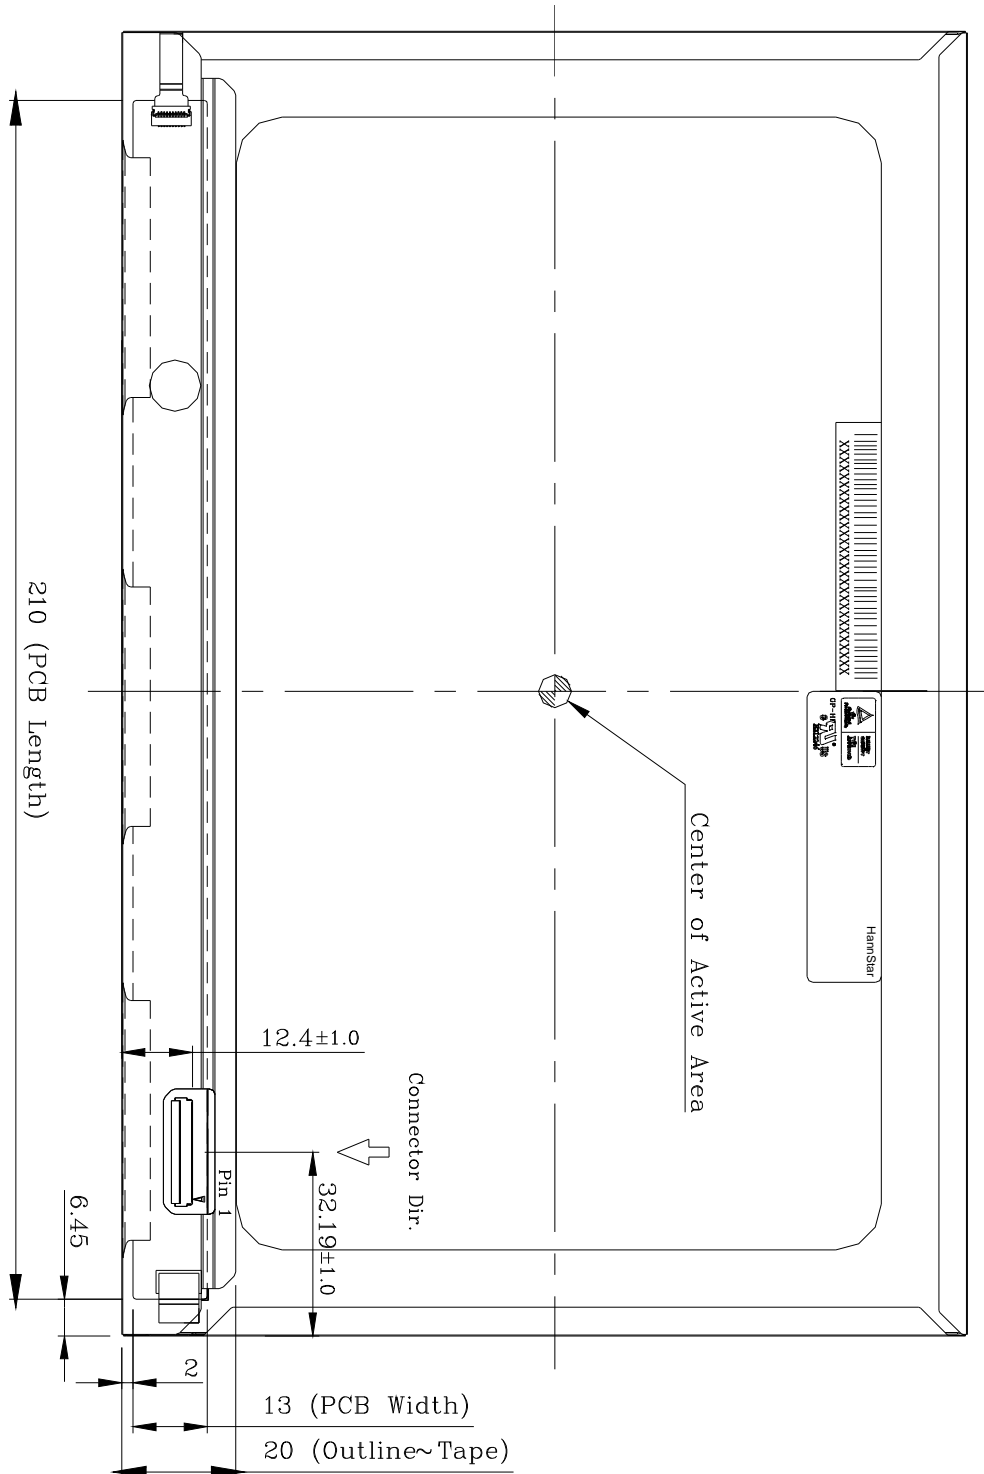



Document Title	HSD101PUW1-A Product Information	Page No.	17/20
Document No.		Revision	1.2

## 9.0 LOT MARK

### 9.1 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----

Code 1,2,3,4,5,6: HannStar internal flow control code.

Code 7: production location.

Code 8: production year.

Code 9: production month.

Code 10,11,12,13,14,15: serial number.

#### Note (1) Production Year

Year	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015
Mark	6	7	8	9	0	1	2	3	4	5

#### Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C

### 9.2 Location of Lot Mark

(1) The label is attached to the backside of the LCD module.

(2) This is subject to change without prior notice.



Document Title	HSD101PUW1-A Product Information	Page No.	18/20
Document No.		Revision	1.2

## 10.0 PACKAGE SPECIFICATION

### 10.1 Packing form

LCM Model	LCM Qty. in the box	Inner Box Size (mm)	Notice
HSD101PUW1-A	30 pcs/box	TBD	

### 10.2 Packing assembly drawings

HSD101PUW1-A	Material	Notice
Box	Corrugated Paper Board	AB Flute
Partition/Pad	Corrugated Paper Board	B Flute
Corner Pad	Corrugated Paper Board	B Flute
Tray	PE	--

## 11.0 GENERAL PRECAUTION

### 11.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

### 11.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

### 11.3 Breakage of LCD Panel

11.3.1. If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.

11.3.2. If liquid crystal contacts mouth or eyes, rinse out with water immediately.

11.3.3. If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

11.3.4. Handle carefully with chips of glass that may cause injury, when the glass is broken.

Document Title	HSD101PUW1-A Product Information	Page No.	19/20
Document No.		Revision	1.2

#### 11.4 Electric Shock

- 11.4.1. Disconnect power supply before handling LCD module.
- 11.4.2. Do not pull or fold the LED cable.
- 11.4.3. Do not touch the parts inside LCD modules and the fluorescent LED's connector or cables in order to prevent electric shock.

#### 11.5 Absolute Maximum Ratings and Power Protection Circuit

- 11.5.1. Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.
- 11.5.2. Please do not leave LCD module in the environment of high humidity and high temperature for a long time.
- 11.5.3. It's recommended to employ protection circuit for power supply.

#### 11.6 Operation

- 11.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.
- 11.6.2 Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.
- 11.6.3 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.
- 11.6.4 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.
- 11.6.5 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.

#### 11.7 Mechanism

Please mount LCD module by using mounting holes arranged in four corners tightly.

#### 11.8 Static Electricity

- 11.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.
- 11.8.2 Because LCD module use CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge. Persons who handle the module should be grounded through adequate methods.

#### 11.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.



Document Title	HSD101PUW1-A Product Information	Page No.	20/20
Document No.		Revision	1.2

#### **11.10 Disposal**

When disposing LCD module, obey the local environmental regulations.