


IMB 262

For high performance digital signage application

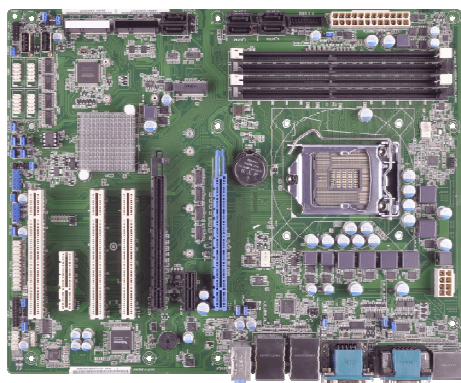

Features

CPU	Option Intel [®] 7 th Generation CPU Core™ i3/i5/i7 CPU
Display port	3
System Memory	DDR4 DIMM X 2
UART	UART connector x 3
LAN	1000Mbps (Intel® I210, I219LM) x 2
Audio	Standard audio jack for analog audio line out
Others	FAN connector x 1
Power supply	ATX
Watch Dog timer	255 levels
Storage	6 x SATA
Expansion Slot	1 PCIe1, 1 PCIe4 , 1 PCIe16 , 3*PCI
TPM	TPM 2.0
Operating Temperature	-10° ~ 60° C
Dimension	ATX

Features

- High performance digital signage platform
- TPM 2.0
- Support PCIe graphics card
- Industrial grade Long life time support

Packing List

Standard
Quick manual

Ordering Information

	Standard
IMB 262	High Computing Power Embedded ATX motherboard
IMB 262 - i3	i3 Embedded ATX motherboard
IMB 262 - i5	High Computing Power Embedded ATX motherboard with i5 CPU, i5-7500
IMB 262- i7	High Computing Power Embedded ATX motherboard with i7 CPU, i7-7700
IMB 262 - i7T	High Computing Power Embedded ATX motherboard with i7 CPU, i7-7700T



Tel: +886-9-2276-6037
Fax: +886-2-2917-3200
E-mail: info@liyatch.com